

AUM60

60cm concealed undermount rangehood







AUM60 60cm concealed undermount rangehood

- AS430 fingerprint-proof stainless steel
- · aluminium filters
- · carbon filter included
- recirculation vent
- 3 speeds, push-button control
- 750m³/hr airflow
- 2 x 1.5W LED lights
- 39.5 dBA (power level 1)
- Ø150mm ducting

10 AMP electrical connection, 3-pin plug and cord 150W motor



	AIRFLOW	NOISE	PRESSURE	POWER OUTLET
	(m³/hr)	(dB)	(Pa)	(₩)
LOW	308	39.5	242	90
MEDIUM	414	46.6	297	110
HIGH	619	56.5	380	189



EAN 9347777000477


DISCLAIMER

Eurolinx PTY LTD is continually seeking ways to improve the design specifications, aesthetics and production techniques of its products. As a result alterations to our products and designs take place continually. Whilst every effort is made to produce information and literature that is up to date, this brochure should not be regarded as an infallible guide to the current specifications, nor does it constitute an offer for the sale of any particular product. Product dimensions indicated in our literature is indicative only. Actual product only should be used to define dimension cutouts. Distributors, and retailers are not agents of Eurolinx and are not authorized to bind Eurolinx by any express or implied undertaking or representation.



AUM60

60cm concealed undermount rangehood

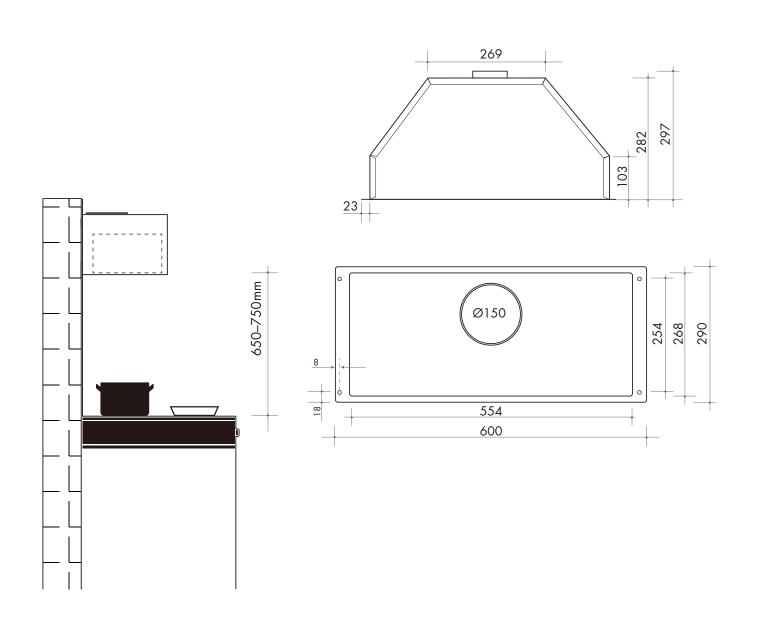

NB: drawings are not to scale — they are to be used as a guide only. For detailed installation instructions, please refer to user guide.

Australia National Telephone Number 1300 694 583 New Zealand Telephone Number 0508 458 369 artusi.com.au ARTUSI showrooms are open daily from 9am-5pm and Saturdays 10am-4pm **NSW & ACT** VIC | SA **TASMANIA** QLD WA | NT **New Zealand** (head office) CAMBERWELL 03 9809 2155 03 6272 7386 07 3397 0850 08 9201 9188 02 8569 4699