

ShowerSelect S
Thermostat HighFlow for concealed installation
 Surfaces: **Chrome** Article Number: **15741003**



Description

product features

- maximum flow rate at 3 bar: 59 l/min
- flow rate upper outlet: 42 l/min
- flow rate lower outlet: 42 l/min
- safety lock at 40° C
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- dirt filter included
- scope of supply: Thermostat, mixing unit, mounting material, assembly instruction
- not included: basic set


Certificates



Product image



Scale drawing

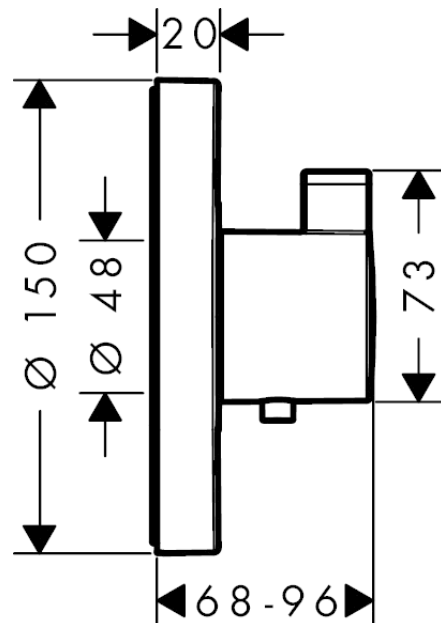

Flowchart

