



tastic[®]

BATHROOM SELECTION GUIDE



Table of Contents

TASTIC® CLASSIC RANGE

Pg 8.	Vivid 2 in 1 (No Fan)	(275W)
Pg 9.	Vivid	(275W)
Pg 10.	Eco Vivid	(275W)
Pg 11.	Triumph 2 in 1 (No Fan)	(275W)
Pg 12.	Triumph	(275W)
Pg 13.	Triumph	(375W)
Pg 14.	Eco Triumph	(275W)
Pg 15.	Easy Duct Triumph	(275W)
Pg 16.	Prime	(275W)
Pg 17.	Original	(275W)
Pg 18.	Paramount	(275W)
Pg 19.	Sensation	(275W)
Pg 20.	Eco Sensation	(275W)
Pg 21.	Easy Duct Sensation	(275W)
Pg 22.	Silhouette	(375W)
Pg 23.	Trade Pack - Vivid	(275W)
Pg 24.	Trade Pack - Prime	(275W)
Pg 25.	Trade Pack - Paramount	(275W)

TASTIC® PREMIUM RANGE

Pg 28.	Luminate Single White Luminate Single Silver	
Pg 29.	Luminate Dual White Luminate Dual Silver	
Pg 30.	Luminate Vent Module White Luminate Vent Module Silver	
Pg 31.	Luminate Vent & Light White Luminate Vent & Light Silver	
Pg 32.	Luminate Heat Module White Luminate Heat Module Silver	





TASTIC® PREMIUM RANGE

- Pg 33.** Neo Single White
Neo Single Silver
- Pg 34.** Neo Dual White
Neo Dual Silver
- Pg 35.** Neo Vent Module White
Neo Vent Module Silver
- Pg 36.** Neo Vent & Light White
Neo Vent & Light Silver
- Pg 37.** Neo Heat Module White
Neo Heat Module Silver

TASTIC® VENTILATION RANGE

- Pg 39.** Ventflo Extraction - 200mm/250mm
- Pg 40.** Eco Ventflo - 200mm/250mm
- Pg 42.** Ventflo Vent n Lite 100
- Pg 43.** Ventflo Vent n Lite Deluxe
- Pg 44.** Ventflo Easy Duct Extraction
- Pg 45.** Trade Pack - Ventflo Easy
Duct Extraction Fan

TASTIC® ACCESSORIES RANGE

- Pg 46.** 6W R63 LED Globe
12W R80 LED Globe
- Pg 47.** 6W R63 Multi Option LED Globe
10W R80 Multi Option LED Globe
- Pg 48.** 275W IXL Genuine Heat Lamps
375W IXL Genuine Heat Lamps
- Pg 49.** 7W GU10 LED Globe
- Pg 50.** Product Specification Chart
- Pg 52.** How the IXL Tastic Works
- Pg 53.** FAQs

tastic®

*Clearly the
best choice for
bathrooms.*

More than 30 years ago, IXL invented the iconic Tastic® 3 in 1 bathroom heat, vent & light device. IXL have steadfastly continued to refine and evolve the Tastic® product to develop the most comprehensive collection of 3 in 1 solutions in the market inclusive of: Tastic® Classic range and Tastic® Premium range.

Each solution has been developed to suit different sized spaces, unique bathing environmental and local climatic conditions.

Every bathroom in Australia can benefit from having the most effective ventilation, illumination and heating source for their budget and needs whether that's a bathroom update, a major refurbishment or new build.





IXL was also first in the marketplace with the launch of the revolutionary Tastic® Premium range, new generation heat, vent and light category – that was conceived to meet demand for a contemporary and sleek product that suites a variety of bathroom styles.

IXL's knowledge of 3 in 1 heat, light and ventilation solutions draws on the company's rich history of innovation and local manufacturing since 1858.

Investing extensively in research and development – IXL's in-house engineers and product team work collaboratively with Australia's leading industrial designers to ensure IXL products are at the forefront of extraction, heat and illumination performance, material durability, safety, service, warranty and aesthetics. The company is committed to providing local jobs, supporting communities and sustaining time – honoured design and manufacturing skills in Australia.

tastic[®]

CLASSIC

“

Clearly
the best
choice for
bathrooms.

”



VIVID

2 x 275W

2 IN 1 (No Fan)



Cool/Warm/
Daylight

Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES


Long Lasting Instant Heat (Infra Red) (x2) 275W Heat Lamps

Energy Saving (LED Globe) 10W R80 Multi Option
(Compatible with 12W R80 LED Light)

Fascia Dimensions 381 mm x 296 mm

Cutout Dimensions Template

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers



MODEL
11325

2 IN 1
HEAT LIGHT

VIVID

2 x 275W

3 IN 1



High Airflow


Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES

Area Suitability	6.46m ² with shower* 16.15m ² without shower
Powerful Extraction	310m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x2) 275W Heat Lamps
Energy Saving (LED Globe)	10W R80 Multi Option (Compatible with 12W R80 LED Light)
Fascia Dimensions:	381 mm x 296 mm
Cutout Dimensions:	Template

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers



Cool/Warm/Daylight

MODEL
11323

3 IN 1
HEAT VENT LIGHT

ECO VIVID

2 x 275W

3 IN 1



High Airflow


Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template
- Back Draught Flaps

FEATURES

Area Suitability	5.54m ² with shower* 13.85m ² without shower
Powerful Extraction	266m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x2) 275W Heat Lamps
Energy Saving (LED Globe)	10W R80 Multi Option (Compatible with 12W R80 LED Light)
Fascia Dimensions	381 mm x 296 mm
Cutout Dimensions	Template
Self Sealing Back Draught Flaps	Suitable for 5 Star Energy Rated Homes**

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers.
**Where exhausting into the roof is allowed.



Cool/Warm/Daylight



MODEL
11344

3 IN 1
HEAT VENT LIGHT

TRIUMPH

2 x 275W

2 IN 1 (No Fan)



Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES


Instant Heat (Infra Red) (x2) 275W Heat Lamps

Long Lasting Energy Saving (LED Globe) 12W R80 LED Light
(Compatible with 10W R80 Multi Option)

Fascia Dimensions: 376 mm x 281 mm

Cutout Dimensions: Template

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers



MODEL
11317

2 IN 1
HEAT LIGHT

TRIUMPH

2 x 275W

3 IN 1




Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES

Area Suitability	5.81m ² with shower* 14.53m ² without shower
Powerful Extraction	279m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x2) 275W Heat Lamps
Energy Saving (LED Globe)	12W R80 LED Light (Compatible with 10W R80 Multi Option)
Fascia Dimensions:	376 mm x 281 mm
Cutout Dimensions:	Template

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers



MODEL
11311

3 IN 1
HEAT VENT LIGHT

TRIUMPH

2 x 375W

3 IN 1




Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES

Area Suitability	5.81m ² with shower* 14.53m ² without shower
Powerful Extraction	279m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x2) 375W Heat Lamps
Energy Saving (LED Globe)	12W R80 LED Light (Compatible with 10W R80 Multi Option)
Fascia Dimensions:	376 mm x 281 mm
Cutout Dimensions:	Template

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers



MODEL
11312

3 IN 1
HEAT VENT LIGHT

ECO TRIUMPH

2 x 275W 3 IN 1




Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template
- Back Draught Flaps

FEATURES

Area Suitability	5.35m ² with shower* 13.39m ² without shower
Powerful Extraction	257m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x2) 275W Heat Lamps
Energy Saving (LED Globe)	12W R80 LED Light (Compatible with 10W R80 Multi Option)
Fascia Dimensions	376 mm x 281 mm
Cutout Dimensions	Template
Self Sealing Back Draught Flaps	Suitable for 5 Star Energy Rated Homes**

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers.

**Where exhausting into the roof is allowed.



MODEL
11341

3 IN 1
HEAT VENT LIGHT

EASY DUCT TRIUMPH

2 x 275W 3 IN 1



Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Inline Exhaust Fan
- Exterior Grille
- Flexi-Duct (6 metres)
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES

Area Suitability 4.38m² with shower*
10.94m² without shower

Powerful Extraction 210m³/h Airflow

Long Lasting Instant Heat (Infra Red) (x2) 275W Heat Lamps


Energy Saving (LED Globe) 12W R80 LED Light
(Compatible with 10W R80 Multi Option)

Fascia Dimensions 376 mm x 281 mm

Cutout Dimensions Template

Self Sealing Back Draught Flaps Suitable for 5 Star Energy Rated Homes**

Ducted Unit (Easy Duct) Ducting Included to Vent Outside

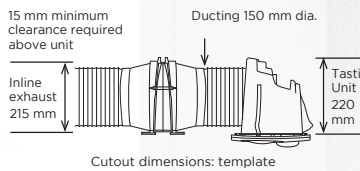

*We recommend, adding additional ventilation above open showers.

**Where exhausting into the roof is allowed.




MODEL
11511

DUCTED 3 IN 1
HEAT VENT LIGHT

PRIME

4 x 275W

3 IN 1

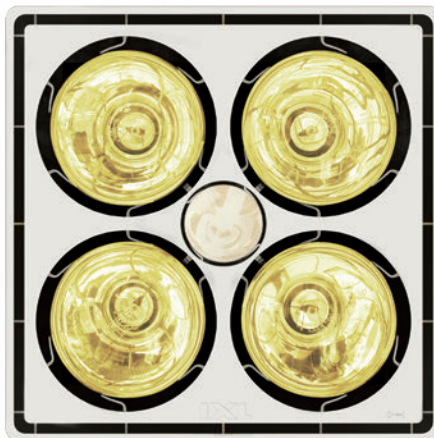

Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template



High Airflow

FEATURES

Area Suitability	6.46m ² with shower* 16.15m ² without shower
Powerful Extraction	310m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x4) 275W Heat Lamps
Energy Saving (LED Globe)	6W R63 Multi Option (Compatible with 6W R63 LED Light)
Fascia Dimensions	350 mm x 350 mm
Cutout Dimensions	262 mm x 262 mm

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers



Cool/Warm/Daylight



MODEL
12309

3 IN 1
HEAT VENT LIGHT

ORIGINAL

4 x 275W

3 IN 1




Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES

Area Suitability	5.9m ² with shower* 14.74m ² without shower
Powerful Extraction	283m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x4) 275W Heat Lamps
Energy Saving (LED Globe)	6W R63 LED Light (Compatible with 6W R63 Multi Option)
Fascia Dimensions:	349 mm x 349 mm
Cutout Dimensions:	262 mm x 262 mm

75 mm minimum clearance required above unit.

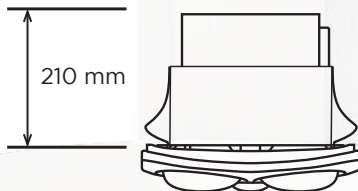

*We recommend, adding additional ventilation above open showers




MODEL
11303

3 IN 1
HEAT VENT LIGHT

PARAMOUNT

4 x 275W

3 IN 1

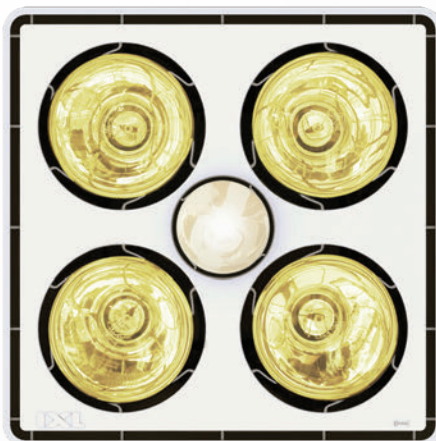

Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template



High Airflow

FEATURES

Area Suitability 8.02m² with shower*
20.05m² without shower

Powerful Extraction 385m³/h Airflow


Long Lasting Instant Heat (Infra Red) (x4) 275W Heat Lamps

Energy Saving (LED Globe) 10W R80 Multi Option
(Compatible with 12W R80 LED Light)

Fascia Dimensions 380 mm x 380 mm

Cutout Dimensions 330 mm x 330 mm

75 mm minimum clearance required above unit.

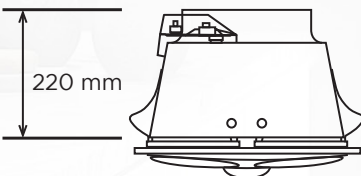

*We recommend, adding additional ventilation above open showers



Cool/Warm/Daylight



MODEL

3 IN 1

12310

HEAT VENT LIGHT

SENSATION

4 x 275W

3 IN 1




Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES

Area Suitability	8.17m ² with shower* 20.42m ² without shower
Powerful Extraction	392m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x4) 275W Heat Lamps
Energy Saving (LED Globe)	12W R80 LED Light (Compatible with 10W R80 Multi Option)
Fascia Dimensions	381 mm x 381 mm
Cutout Dimensions	330 mm x 330 mm

75 mm minimum clearance required above unit.

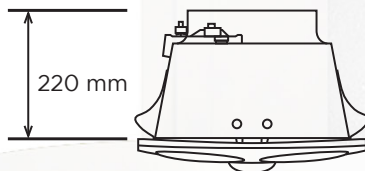

*We recommend, adding additional ventilation above open showers



MODEL
12303

3 IN 1
HEAT VENT LIGHT

ECO SENSATION

4 x 275W

3 IN 1




Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template
- Back Draught Flaps

FEATURES

Area Suitability	7.25m ² with shower* 18.13m ² without shower
Powerful Extraction	348m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x4) 275W Heat Lamps
Energy Saving (LED Globe)	12W R80 LED Light (Compatible with 10W R80 Multi Option)
Fascia Dimensions	381 mm x 381 mm
Cutout Dimensions	330 mm x 330 mm
Self Sealing Back Draught Flaps	Suitable for 5 Star Energy Rated Homes**

90 mm minimum clearance required above unit.

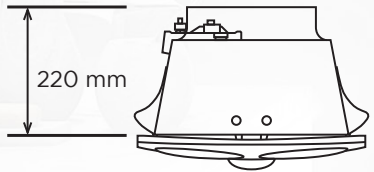

*We recommend, adding additional ventilation above open showers.

**Where exhausting into the roof is allowed.



MODEL
12343

3 IN 1
HEAT VENT LIGHT

EASY DUCT SENSATION

4 x 275W

3 IN 1




Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Inline Exhaust Fan
- Exterior grille
- Flexi-Duct (6 metres)
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES

Area Suitability	4.65m ² with shower* 11.61m ² without shower
Powerful Extraction	223m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x4) 275W Heat Lamps
Energy Saving (LED Globe)	12W R80 LED Light (Compatible with 10W R80 Multi Option)
Fascia Dimensions	381 mm x 381 mm
Cutout Dimensions	330 mm x 330 mm
Self Sealing Back Draught Flaps	Suitable for 5 Star Energy Rated Homes**
Ducted Unit (Easy Duct)	Ducting Included to Vent Outside

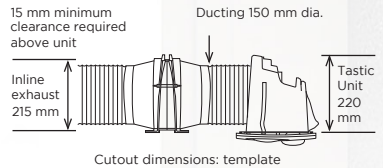

*We recommend, adding additional ventilation above open showers.

**Where exhausting into the roof is allowed.



MODEL
12511

DUCTED 3 IN 1
HEAT VENT LIGHT

SILHOUETTE

4 x 375W

3 IN 1




Product Includes:

- Wall Switch
- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES

Area Suitability	8.48m ² with shower* 21.20m ² without shower
Powerful Extraction	407m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x4) 375W Heat Lamps
Energy Saving (LED Globe)	12W R80 LED Light (Compatible with 10W R80 Multi Option)
Fascia Dimensions	366 mm x 366 mm
Cutout Dimensions	330 mm x 330 mm

75 mm minimum clearance required above unit.

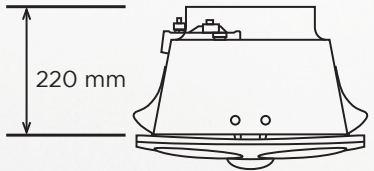

*We recommend, adding additional ventilation above open showers



MODEL
12301

3 IN 1
HEAT VENT LIGHT

TRADE PACK VIVID

2 x 275W
3 IN 1




Product Includes:

- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template

FEATURES	
Area Suitability	6.46m ² with shower* 16.15m ² without shower
Powerful Extraction	310m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x2) 275W Heat Lamps
Energy Saving (LED Globe)	10W R80 Multi Option (Compatible with 12W R80 LED Light)
Fascia Dimensions	381 mm x 296 mm
Cutout Dimensions	Template

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers



MODEL
11463

3 IN 1
HEAT VENT LIGHT

TRADE PACK PRIME

4 x 275W
3 IN 1



Product Includes:

- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template



High Airflow

FEATURES

Area Suitability	6.46m ² with shower*
	16.15m ² without shower
Powerful Extraction	310m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x4) 275W Heat Lamps
Energy Saving (LED Globe)	6W R63 Multi Option (Compatible with 6W R63 LED Light)
Fascia Dimensions	350 mm x 350 mm
Cutout Dimensions	262 mm x 262 mm

75 mm minimum clearance required above unit.



*We recommend, adding additional ventilation above open showers



Cool/Warm/Daylight




MODEL
11454

3 IN 1
HEAT VENT LIGHT

TRADE PACK PARAMOUNT

4 x 275W
3 IN 1

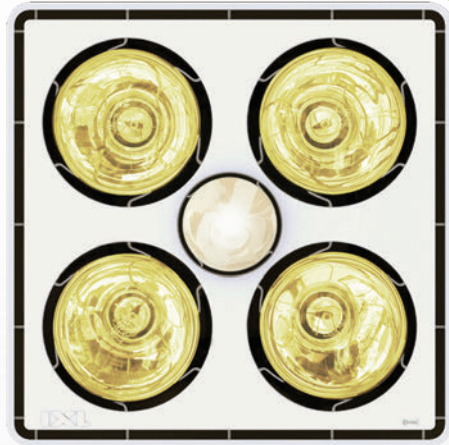

Product Includes:

- Heat & LED Light Bulbs
- Powerful Exhaust Fan
- Dishwasher Safe Fascia for Easy Clean
- Cut Out Template




High Airflow

FEATURES

Area Suitability	8.02m ² with shower*
	20.05m ² without shower
Powerful Extraction	385m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x4) 275W Heat Lamps
Energy Saving (LED Globe)	10W R80 Multi Option (Compatible with 12W R80 LED Light)
Fascia Dimensions	380 mm x 380 mm
Cutout Dimensions	330 mm x 330 mm

75 mm minimum clearance required above unit.

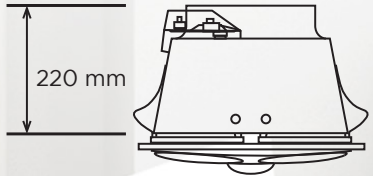

*We recommend, adding additional ventilation above open showers



Cool/Warm/Daylight



MODEL
11475

3 IN 1
HEAT VENT LIGHT



tastic[®]
PREMIUM



LUMINATE SINGLE 3 IN 1



Product Includes:

- Plug & Play Wall Switch
- Dimmable Warm/Cool LED Light Panel
- 800W Heat Lamp
- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- Cut Out Template

FEATURES

Area Suitability 10m² with shower*/ 25m² without shower

Powerful Extraction 480m³/h Airflow

Long Lasting Instant Heatlamp (Infra Red) (x1) 800W, Auto cut off after an hour

LED 25W Warm 3000K/ Cool 4000K Dimmable, Switchable Warm/Cool to suit personal preference. Energy Saving

Unit Dimensions(WxLxD) 367 mm x 483 mm x 198 mm

Cutout Dimensions 332 mm x 462 mm

Ducted Unit (Easy Duct) Ducting Included to Vent Outside

*We recommend, adding additional ventilation above open showers



High Airflow
480m³/hr



Plug & Play
Wall Switch



Halo Heat™
Technology



Ventflo In-Line
Extraction



Auto Heat Lamp
Timer Cut Off



MODEL
31411
WHITE

3 IN 1
HEAT VENT LIGHT

MODEL
31412
SILVER

LUMINATE DUAL 3 IN 1



Product Includes:

- Plug & Play Wall Switch
- Dimmable Warm/Cool LED Light Panel
- 2x 800W Heat Lamps
- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- Cut Out Template

FEATURES

Area Suitability	10m ² with shower*/ 25m ² without shower
Powerful Extraction	480m ³ /h Airflow
Long Lasting Instant Heatlamp (Infra Red)	(x2) 800W, Auto cut off after an hour
LED	25W Warm 3000K/ Cool 4000K Dimmable, Switchable Warm/Cool to suit personal preference. Energy Saving
Unit Dimensions(WxLxD)	367 mm x 733 mm x 198 mm
Cutout Dimensions	332 mm x 712 mm
Ducted Unit (Easy Duct)	Ducting Included to Vent Outside



High Airflow
480m³/hr



Plug & Play
Wall Switch

*We recommend, adding additional ventilation above open showers



Halo Heat™
Technology



Ventflo In-Line
Extraction



Auto Heat Lamp
Timer Cut Off



MODEL
32411
WHITE

3 IN 1
HEAT VENT LIGHT

MODEL
32412
SILVER

LUMINATE VENT MODULE



Product Includes:

- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- Cut Out Template

FEATURES	
Area Suitability	8.3m ² with shower* 20.8m ² without shower
Powerful Extraction	400m ³ /h Airflow
Unit dimensions(WxLxD)	367 mm x 243 mm x 210 mm
Cutout dimensions	332 mm x 214 mm
Ducted Unit (Easy Duct)	Ducting Included to Vent Outside

*We recommend, adding additional ventilation above open showers



High Airflow
400m³/hr



IPX4
Rated



Ventflo In-Line
Extraction



Max Airflow
400m³/hr



IPX4
Rated



MODEL
35401
WHITE

MODEL
35402
SILVER

LUMINATE VENT & LIGHT 2 IN 1



Product Includes:

- Plug & Play Wall Switch
- Dimmable Warm/Cool LED Light Panel
- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- Cut Out Template

FEATURES

Area Suitability	8.3m ² with shower* 20.8m ² without shower
Powerful Extraction	400m ³ /h Airflow
Energy Saving (LED Panel)	15W Warm 3000K/Cool 4000K
Unit dimensions(WxLxD)	367 mm x 243 mm x 210 mm
Cutout dimensions	332 mm x 214 mm
Ducted Unit (Easy Duct)	Ducting Included to Vent Outside

*We recommend, adding additional ventilation above open showers



High Airflow
400m³/hr



IPX4
Rated



Ventflo In-Line
Extraction



Max Airflow
400m³/hr



IPX4
Rated



MODEL
34401
WHITE

**2 IN 1
HEAT LIGHT**

MODEL
34402
SILVER

LUMINATE HEAT MODULE

Product Includes:

- 800W Heat Lamp
- Cut Out Template

FEATURES

Instant Heat(Infra Red)	(x1) 800W Heat Lamp
Unit dimensions(WxLxD)	367 mm x 326 mm x 160 mm
Cutout dimensions	332 mm x 292 mm



MODEL
36411
WHITE

3 IN 1
HEAT VENT LIGHT

MODEL
36412
SILVER 32.

NEO SINGLE 3 IN 1



Product Includes:

- Wall Switch
- Gimbal-mounted LED downlights
- 800W Heat Lamp
- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- Cut Out Template

FEATURES

Area Suitability	7.21m ² with shower* 18.02m ² without shower
Powerful Extraction	346m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x1) 800W Heat Lamp
LED Omni Lighting	3x 7W Gimbal-mounted LED Downlights
Unit Dimensions(WxLxD)	358 mm x 476mm x 166mm
Cutout Dimensions	332 mm x 462 mm
Ducted Unit (Easy Duct)	Ducting Included to Vent Outside

*We recommend, adding additional ventilation above open showers



Halo Heat™ Technology



Ventflo In-Line Extraction



Max Airflow 346m³/hr



MODEL
31111
WHITE

3 IN 1
HEAT VENT LIGHT

MODEL
31112
SILVER

NEO DUAL 3 IN 1



Product Includes:

- Wall Switch
- Gimbal-mounted LED downlights
- 2x 800W Heat Lamps
- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- Cut Out Template

FEATURES

Area Suitability	7.21m ² with shower* 18.02m ² without shower
Powerful Extraction	346m ³ /h Airflow
Long Lasting Instant Heat (Infra Red)	(x2) 800W Heat Lamps
LED Omni Lighting	3x 7W Gimbal-mounted LED Downlights
Unit Dimensions (WxLxD)	358 mm x 729mm x 166mm
Cutout Dimensions	332 mm x 712 mm
Ducted Unit (Easy Duct)	Ducting Included to Vent Outside

*We recommend, adding additional ventilation above open showers



Halo Heat™
Technology



Ventflo In-Line
Extraction



Max Airflow
346m³/hr



MODEL
32111
WHITE

3 IN 1
HEAT VENT LIGHT

MODEL
32112
SILVER 34.

NEO VENT MODULE



Product Includes:

- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- Cut Out Template

FEATURES

Area Suitability	7.81m ² with shower* 19.53m ² without shower
Powerful Extraction	375m ³ /h Airflow
Unit Dimensions(WxLxD)	361 mm x 237 mm x 201 mm
Cutout Dimensions	332 mm x 214 mm
Ducted Unit (Easy Duct)	Ducting Included to Vent Outside



IPX4

IPX4
Rated

*We recommend, adding additional ventilation above open showers



Ventflo In-Line
Extraction




Max Airflow
375m³/hr



MODEL
35101
WHITE

MODEL
35102
SILVER

NEO VENT & LIGHT 2 IN 1

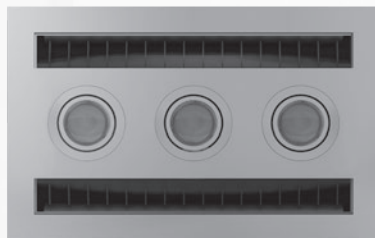

Product Includes:

- Gimbal-mounted LED downlights
- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- Cut Out Template

FEATURES

Area Suitability	7.81m ² with shower* 19.53m ² without shower
Powerful Extraction	375m ³ /h Airflow
Unit Dimensions(WxLxD)	361 mm x 237 mm x 201 mm
Cutout Dimensions	332 mm x 214 mm
Ducted Unit (Easy Duct)	Ducting Included to Vent Outside
LED Omni Lighting	3x 7W Gimbal-mounted LED Downlights

*We recommend, adding additional ventilation above open showers



Ventflo In-Line
Extraction



Max Airflow
375m³/hr



MODEL
34101
WHITE

2 IN 1
VENT LIGHT

MODEL
34102
SILVER

NEO HEAT MODULE



Product Includes:

- 800W Heat Lamp
- Cut Out Template

FEATURES

Long Lasting Instant Heat(Infra Red) (x1) 800W Heat Lamp

Unit Dimensions(WxLxD) 361 mm x 320 mm x 156 mm

Cutout Dimensions 332 mm x 292 mm



Halo Heat™
Technology



MODEL
36111
WHITE

MODEL
36112
SILVER



tastic[®]
VENTILATION



VENTFLO™ EXTRACTION FAN

200mm / 250mm



Benefits:

- Powerful exhaust fan (two fan sizes available)
- Suitable for bathrooms, kitchens, laundries & toilets
- Fascia clips off for easy cleaning
- Comes with flex and plug for simple installation

Optional Accessory: Square fascia, Model no. 636036

TYPE	Ventflo 200	Ventflo 250
Light	NA	NA
Supply (Volts)	240	240
Fan Size (mm)	200	250
Capacity m ² /h vs L/s:	259/72	511/142
Cutout size (mm)	240 dia.	295 dia.
Total Clearance Req. (mm)	180	180
Watts	40	40



Max Airflow
(200)259 m³/hr
(250)511 m³/hr



MODEL
10325 (200mm)

MODEL
10320 (250mm) 39.

ECO VENTFLO™


200mm /
250mm

IXL Eco Ventflo™ - Self-sealing design, preventing un- wanted heat loss


IXL's Eco Ventflo™ products have been designed using twin back draught shutters to prevent warm air escaping from your bathroom into the roof cavity when the exhaust fan is not in use.

This helps to maintain a comfortable temperature in the bathroom, meaning less energy is required for heating. It also prevents draughts from entering the room via the ceiling.

This clever design means the Eco Ventflo™ is suitable for use in 5 star energy rated homes where exhausting into the roof cavity is allowable.

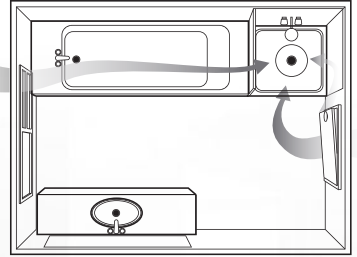

Shown installed above shower

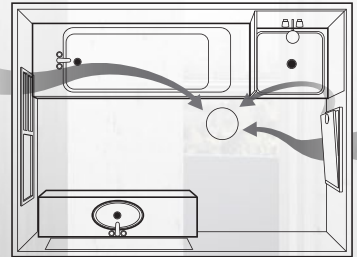

Shown installed between shower
and bath



ECO VENTFLO™

200mm /
250mm



Benefits:

- Powerful Extraction
- Suitable for bathrooms, kitchens, laundries and toilets
- IP24 Rated - can be installed directly above a shower
- Dishwasher safe fascia
- Self sealing back draught flaps, suitable for 5 Star Energy rated homes*

TYPE	Eco Ventflo 200	Eco Ventflo 250
Fan (mm)	200	250
Supply (Volts)	240	240
Capacity m3/h	340	490
Capacity L/s	94	136
IP24 Rated	Yes	Yes
Cutout size (mm)	244 dia.	294 dia.
Total Ceiling Cavity Req. (mm)	215	260
Watts	30	52

*Where exhausting into the roof is allowed.



Max Airflow
(200)340m³/hr
(250)490m³/hr



IP24 Rated



5
Energy Rated
Homes**




3
YEAR
REPLACEMENT
WARRANTY

MODEL
10324 (200mm)

MODEL
10326 (250mm)

VENTFLO™ VENT n LITE 100

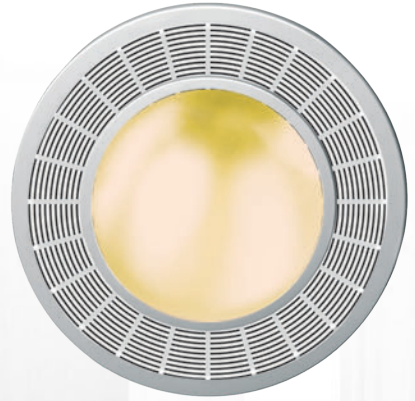

Benefits:

- Powerful extraction
- Suitable for bathrooms, kitchens, laundries & toilets
- Light and exhaust fan in one unit
- Light and fan can be operated separately
- Fascia clips off for easy cleaning, dishwasher safe

TYPE	Vent n Lite 100
Fan (mm)	200
Supply (Volts)	240
Capacity m ³ /h vs L/s	259/72
Light	100W BC (not included)
Cutout size (mm)	265 dia.
Total Ceiling Cavity Req. (mm)	233
Watts	140



Max Airflow
259m³/hr



MODEL
10310

VENTFLO™ VENT N LITE DELUXE



Benefits:

- Powerful extraction
- Suitable for bathrooms, kitchens, laundries & toilets
- Light and exhaust fan in the one unit
- 2 speed fan option
- Light & fan can be operated separately
- Fascia clips off for easy cleaning, dishwasher safe

TYPE	Vent n Lite Deluxe
Fan (mm)	200
Supply (Volts)	240
Capacity m3/h vs L/s	321/92
Light	2 x 6W LED
Cutout size (mm)	262 mm x 262 mm
Total Ceiling Cavity Req. (mm)	285
Watts	124



Max Airflow
321m³/hr



MODEL
10363

2 IN 1
VENT LIGHT

VENTFLO™ EASY DUCT



Benefits:

- Fully ducted ventilation unit
With 170mm exhaust fan
- Engineered to seal when not in use
- Ideal for eco sensitive designs and
5 star energy rated homes
- Flex and plug included for simple installation
- Self sealing back draught flaps,
suitable for 5 Star Energy rated homes**

Pack includes:

- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- 2 x interior/exterior grille
- 1 x in-line exhaust unit

TYPE	Ventflo Easy Duct
Fan (mm)	170
Supply (Volts)	240
Capacity m3/h vs L/s	198/55*
Cutout size (mm)	160 mm x 160 mm
Total Ceiling Cavity Req. (mm)	230
Watts	40

*Ducted exhaust systems return a lower l/sec rate due to resistance created by the ducting.

**Where exhausting into the roof is allowed.



Ventflo In-Line
Extraction



Exhaust Fan
with Ducting



Max Airflow
198 m³/hr



MODEL
10380

TRADE PACK VENTFLO™ EASY DUCT



Benefits:

- Fully ducted ventilation unit
With 170mm exhaust fan
- Engineered to seal when not in use
- Ideal for eco sensitive designs and
5 star energy rated homes
- Flex and plug included for simple installation
- Switch is not included
- Self sealing back draught flaps,
suitable for 5 Star Energy Rated Homes**

Pack includes:

- Exhaust Fan with 6m Duct and Exterior Outlet Vent
- 2 x interior/exterior grille
- 1 x in-line exhaust unit

TYPE	Ventflo Easy Duct
Fan (mm)	170
Supply (Volts)	240
Capacity m3/h vs L/s	403/112*
Cutout size (mm)	160 mm x 160 mm
Total Ceiling Cavity Req. (mm)	230
Watts	75

*Ducted exhaust systems return a lower l/sec rate due to resistance created by the ducting.

**Where exhausting into the roof is allowed.



Ventflo In-Line
Extraction



Exhaust Fan
with Ducting



Max Airflow
403m³/hr



MODEL
10383

6W R63 LED GLOBE



Suitable for IXL Models:

Tastic Classic-11303*, 12309, 11454

The IXL 6W LED R63 Globe is an energy saving globe with a long life performance of up to 25,000 hours. The IXL 6W LED R63 globe has been specifically developed to fit genuine IXL Tastic products (where applicable).

Rated Voltage (V)	220 -240
Input Power (W)	6
Colour Temperature (Kelvins)	4000
Luminous Flux (lm)	500
Luminous Efficacy (lm/W)	>85
CRI	>80
Beam Angle	110°
Rated Life (Hrs)	25,000
Dimmable	No
Instant Light	Yes
Lamp Base	E27
Dimension (mm)	63W x 104H

12W R80 LED GLOBE



Suitable for IXL Models:

11311*, 11323, 11312*, 11317*, 11325, 12303*, 12310, 12301*, 11341*, 11344, 12343*, 11511*, 12511*, 11463, 11475

The IXL 12W LED R80 Globe is an energy saving globe with a long life performance of up to 25,000 hours. The IXL 12W LED R80 globe has been specifically developed to fit genuine IXL Tastic products (where applicable).

Rated Voltage (V)	220 -240
Input Power (W)	12
Colour Temperature (Kelvins)	4000
Luminous Flux (lm)	800
Luminous Efficacy (lm/W)	>70
CRI	>80
Beam Angle	110°
Rated Life (Hrs)	25,000
Dimmable	No
Instant Light	Yes
Lamp Base	E27
Dimension (mm)	80W x 112H

MODEL
12214

MODEL
12281 46.

6W R63 MULTI OPTION LED GLOBE

NEW!

Suitable for
IXL Models:

Tastic Classic-11303*,
12309, 11454



IXL Tastic energy-saving LED multi option globe for long life and performance. Simply double-click the wall switch to choose warm white, cool white and daylight to the desired brightness.

Rated Voltage (V)	220 -240
Input Power (W)	6
Colour Temperature (Kelvins)	3000K-Warm White 4000K-Cool White 5000K-Daylight
Luminous Flux (lm)	500
Luminous Efficacy (lm/W)	>80
CRI	>80
Beam Angle	110°
Rated Life (Hrs)	25,000
Dimmable	No
Instant Light	Yes
Lamp Base	E27
Dimension (mm)	63W x 104H

10W R80 MULTI OPTION LED GLOBE

NEW!

Suitable for IXL
Models:

11311*, 11323, 11312*,
11317*, 11325, 12303*,
12310, 12301*, 11341*,
11344, 12343*, 11511*,
12511*, 11463, 11475



IXL Tastic energy-saving LED multi option globe for long life and performance. Simply double-click the wall switch to choose warm white, cool white and daylight to the desired brightness.

Rated Voltage (V)	220 -240
Input Power (W)	10
Colour Temperature (Kelvins)	3000K-Warm White 4000K-Cool White 5000K-Daylight
Luminous Flux (lm)	800
Luminous Efficacy (lm/W)	>80
CRI	>80
Beam Angle	110°
Rated Life (Hrs)	25,000
Dimmable	No
Instant Light	Yes
Lamp Base	E27
Dimension (mm)	80W x 112H

MODEL
12215

MODEL
12282 47.

275W IXL GENUINE HEAT LAMPS



**Suitable for
IXL Models:**
Tastic Classic
Range

The IXL 275W instant infrared heat lamp has been specially engineered to give optimum performance to IXL Tastic. IXL heat lamps are specifically designed to focus the maximum amount of heat possible, whilst remaining economical to run. Long life of 5,000 hours.

Rated Voltage (V)	220 -240
Input Power (W)	275W
Rated Life (Hrs)	5,000
Lamp Base	E27
Dimension (mm)	126W x 188H

375W IXL GENUINE HEAT LAMPS



**Suitable for
IXL Models:**
Tastic Classic
11312, 12301

The IXL 375W instant infrared heat lamp has been specially engineered to give optimum performance to IXL Tastic. IXL heat lamps are specifically designed to focus the maximum amount of heat possible, whilst remaining economical to run. Long life of 5,000 hours.

Rated Voltage (V)	220 -240
Input Power (W)	375W
Rated Life (Hrs)	5,000
Lamp Base	E27
Dimension (mm)	126W x 188H

7W GU10 LED CENTRE GLOBE



**Suitable for
IXL Models:**
Tastic Neo Range

The IXL 7W GU10 LED globe is an energy saving globe with a long life performance of up to 25,000 hours. The IXL 7W LED globe has been specifically developed to fit the IXL Tastic® Neo range of products.

Rated Voltage (V)	220 -240
Input Power (W)	7W
Colour Temperature (Kelvins)	4000K
Lumen Output	500
Luminous Efficacy (lm/W)	>70
CRI	>80
Beam Angle	100°
Rated Life (Hrs)	25,000
Dimmable	No
Instant Light	Yes
Lamp Base	GU10
Dimension (mm)	50W x 57H

MODEL
12253

PRODUCT SPECIFICATION CHART

TASTIC CLASSIC RANGE	Product Name	Model Number	200 mm Fan	170 mm Fan	6W Standard LED Globe	6W R63 LED Globe (Multi-option)	10W R80 LED Globe (Multi-option)	12W Standard LED Globe	Back Draught Flaps	Ducted to Outside
	Vivid 2 IN 1 (No Fan)	11325	NO FAN				●	*		
	Vivid 3 IN 1	11323	●				●	*		
	Eco Vivid 3 IN 1	11344	●				●	*	●	
	Triumph 2 IN 1 (No Fan)	11317	NO FAN				*	●		
	Triumph 3 IN 1 (275W)	11311	●				*	●		
	Triumph 3 IN 1 (375W)	11312	●				*	●		
	Eco Triumph 3 IN 1	11341	●				*	●		
	Easy Duct Triumph	11511		●			*	●	●	●
	Prime 3 IN 1	12309	●		*	●				
	Original 3 IN 1	11303	●		●	*				
	Paramount 3 IN 1	12310	●					*		
	Sensation 3 IN 1	12303	●				*	●		
Eco Sensation 3 IN 1	12343	●				*	●	●		
Easy Duct Sensation	12511		●			*	●	●	●	
Silhouette 3 IN 1	12301	●				*	●			

TASTIC TRADE PACK	Product Name	Model Number	200 mm Fan	170 mm Fan	6W Standard LED Globe	6W R63 LED Globe (Multi-option)	10W R80 LED Globe (Multi-option)	12W Standard LED Globe	Back Draught Flaps	Ducted to Outside
	Vivid 3 IN 1 TRADE PK	11463	●				●	*		
	Prime 3 IN 1 TRADE PK	11454	●		*	●				
Paramount 3 IN 1 TRADE PK	11475	●				●	*			

* Compatible

TASTIC PREMIUM RANGE	Product Name	Model Number	LED light wattage	LED Colour Temp		Heat lamp wattage	Fan Size (mm)	Minimum ceiling height (m)	Maximum ceiling height (m)	Max Height of Unit mm
				Warm White 3000K	Cool White 4000K					
	Luminate Single White	31411	25	●	●	800	170	2.2	2.7	230
	Luminate Single Silver	31412	25	●	●	800	170	2.2	2.7	230
	Luminate Dual White	32411	25	●	●	1600	170	2.2	3.3	230
	Luminate Dual Silver	32412	25	●	●	1600	170	2.2	3.3	230
	Luminate Vent White	35401	NA			NA	170	NA	NA	230
	Luminate Vent Silver	35402	NA			NA	170	NA	NA	230
	Luminate Vent & Light White	34401	15	●	●	NA	170	NA	NA	230
	Luminate Vent & Light Silver	34402	15	●	●	NA	170	NA	NA	230
	Luminate Heat White	36411	NA			800	NA	2.2	NA	160
	Luminate Heat Silver	36412	NA			800	NA	2.2	NA	160
	Neo Single White	31111	3x7W-GU10		●	800	170	2.2	2.7	230
Neo Single Silver	31112	3x7W-GU10		●	800	170	2.2	2.7	230	
Neo Dual White	32111	3x7W-GU10		●	1600	170	2.2	3.3	230	
Neo Dual Silver	32112	3x7W-GU10		●	1600	170	2.2	3.3	230	
Neo Vent White	35101	NA			NA	170	NA	NA	230	
Neo Vent Silver	35102	NA			NA	170	NA	NA	230	
Neo Vent n Lite White	34101	3x7W-GU10		●	NA	170	NA	NA	230	
Neo Vent n Lite Silver	34102	3x7W-GU10		●	NA	170	NA	NA	230	
Neo Heat White	36111	NA			800	NA	2.2	2.7	160	
Neo Heat Silver	36112	NA			800	NA	2.2	2.7	160	

TASTIC VENTILATION RANGE	Product Name	Model Number	200 mm Fan	250 mm Fan	170 mm Fan	Light & exhaust Fan	Back Draught Flaps	Ducted to Outside
	VENTFLO 200/250mm	10325 / 10320	●	●				
	ECO VENTFLO 200/250mm	10324 / 10326	●	●			●	
	VENTFLO VENT N LITE DELUXE	10363	●			●		
	VENTFLO VENT N LITE 100	10310	●			●		
	VENTFLO EASY DUCT	10380				●		●
VENTFLO EASY DUCT TRADE PACK	10383				●		●	

Capacity		Half Heat Function	Cutout Dimensions (mm)	Max Ceiling Height	Max Height of Unit mm	Clearance Required above Unit (mm)	Minimum Ceiling Cavity Required (mm)	Watts (Fan in brackets)	Area Suitability with Shower (up to _m ²)
Litres/Sec	m ³ /hr								
NA	N/A		Template	2.4m	230	75	305	560	NA
86	310		Template	2.4m	230	75	305	600 (40)	6.46
74	266		330 x 330	2.4m	290	75	365	600 (40)	5.54
NA	N/A		Template	2.4m	230	75	305	562	NA
78	279		Template	2.4m	230	75	305	602 (40)	5.81
78	279		Template	2.7m	230	75	305	802 (40)	5.81
72	257		Template	2.4m	290	75	365	602 (40)	5.35
58	210		Template	2.4m	215(inline fan)	15	230	602 (40)	4.38
86	310	●	262 x 262	2.7m	210	75	285	1146 (40)	6.46
79	283	●	262 x 262	2.7m	210	75	285	1146 (40)	5.90
107	385	●	330 x 330	2.7m	220	75	295	1150 (40)	8.02
109	392	●	330 x 330	2.7m	220	75	295	1152 (40)	8.17
97	348	●	Template	2.7m	220	90	310	1152 (40)	7.25
62	223	●	330 x 330	2.7m	215(inline fan)	15	230	1152 (40)	4.65
113	407	●	330 x 330	3.3m	220	75	295	1552 (40)	8.48

86	310		Template	2.4m	230	75	305	600 (40)	5.81
86	310	●	262 x 262	2.7m	210	75	285	1146 (40)	6.46
107	385	●	330 x 330	2.7m	220	75	295	1150 (40)	8.02

Clearance Required above Unit mm	Capacity (litres /sec)	Capacity (m ³ /h)	Total Ceiling Cavity Required mm	Current Rating (Amps)	Watts (Fan in brackets)	Wall switch included	Ducting Included	Back draft flaps	Unit dimensions (mm)	IPX4 Rated
15	133	480	245	3.6	875(75)	●	●	●	367Wx483Lx198D	
15	133	480	245	3.6	875(75)	●	●	●	367Wx483Lx198D	
15	133	480	245	7.0	1675(75)	●	●	●	367Wx733Lx198D	
15	133	480	245	7.0	1675(75)	●	●	●	367Wx733Lx198D	
15	111	400	245	0.3	0(75)		●	●	367Wx243Lx210D	●
15	111	400	245	0.3	0(75)		●	●	367Wx243Lx210D	●
15	111	400	245	0.4	90(75)	●	●	●	367Wx243Lx210D	●
15	111	400	245	0.4	90(75)	●	●	●	367Wx243Lx210D	●
15	NA	NA	175	3	800(0)				367Wx326Lx160D	
15	NA	NA	175	3	800(0)				367Wx326Lx160D	
15	96	346	245	3.6	875(75)	●	●	●	367Wx483Lx198D	
15	96	346	245	3.6	875(75)	●	●	●	367Wx483Lx198D	
15	96	346	245	7.0	1675(75)	●	●	●	367Wx733Lx198D	
15	96	346	245	7.0	1675(75)	●	●	●	367Wx733Lx198D	
15	104	375	245	0.3	0(75)		●	●	367Wx243Lx210D	●
15	104	375	245	0.3	0(75)		●	●	367Wx243Lx210D	●
15	104	375	245	0.4	96(75)		●	●	367Wx243Lx210D	
15	104	375	245	0.4	96(75)		●	●	367Wx243Lx210D	
15	NA	NA	175	3.3	800(0)				367Wx326Lx160D	
15	NA	NA	175	3.3	800(0)				367Wx326Lx160D	

	Capacity		Area Suitability Room with Shower (m ³)	Light	Cutout Size (mm)	Clearance Required above Unit (mm)	Watts	IPX4 Rated
	Litres/Sec	m ³ /hr						
	72/142	259/511	12.95 / 25.55	NA/NA	240/295 dia.	180/180	40/40	
	94/136	340/490	17 / 24.50	NA/NA	244/294 dia.	215/260	30/52	●
	92	321	12.95	2x 42W Halogen (incl.)	262 x 262	285	124	
	72	259	12.95	100W BC (not incl.)	265 dia.	233	140	
	55	198		NA	160 dia.	230	40	NA
	112	403		NA	160 dia.	230	40	NA

HOW THE IXL TASTIC® WORKS

The IXL Tastic® range has been designed to exacting standards to give you many years of trouble-free operation. To ensure you get the most from your Tastic® there are a few simple points to keep in mind.

HEAT LAMPS

The IXL Tastic Heat Lamps have no warm up period because the infra-red lamps provide instantaneous heat, and are designed to heat you and not your bathroom - that's the efficient way infra-red heat works. You'll save money and energy, with an average cost of around one cent a shower if used correctly, (based on average 5 minute drying time). Also, to get the full benefit of Tastic's infra-red warmth, stand directly under the heat lamps. IXL's exclusive clear heat lamps have been designed specifically for this application, and concentrate their heat for maximum effectiveness.

Make sure you have the Tastic model that suits your bathroom ceiling height. The Tastic is manufactured to offer peak heating performance with bathroom ceiling heights up to 2.4 m for the Triumph models with 275W heat lamps and 2.7 m for the Triumph model with 375W heat lamps, Sensation & Original models. The Silhouette is suitable for bathrooms with a ceiling height of up to 3.3 m.

The Tastic half heat function is available on the 4 lamp models, and is another energy saving feature, allowing you to adjust the heat level to suit prevailing conditions or personal preference.

VENTILATION

To ensure optimum performance of the exhaust fan, it is essential that there is adequate air flow into your bathroom to help the Tastic's powerful and efficient exhaust fan to quickly remove steam while you shower.

Your Tastic works by drawing steam-laden air from the room, and as with all exhaust fans it is essential that sufficient air inlet is provided. Ensure adequate inlets exist through windows, vents or under the door. Air flow path from inlet to fan should ideally pass over the steam source.

CENTRE LIGHT

The centre light in all Tastic models is designed to provide general illumination in your bathroom.

For specific tasks like shaving or putting make-up on, you may need extra lighting to suit your individual needs.

Heat lamps can also be used to provide additional bright illumination for your bathroom. Lighter coloured walls and decor also help brighten your bathroom by reflecting more light.

FREQUENTLY ASKED QUESTIONS ?

Q Will my Tastic heat my bathroom?

A No your Tastic is designed to provide infra-red radiant heat to warm the body while drying, when standing directly underneath. It is not designed as a room heater.

Q Can I install my Tastic directly above a shower recess?

A For safety reasons it is not recommended to install above shower recess. Please refer to the current Australian/New Zealand Wiring Rules AS/NZS 3000 relating to damp situations for further details.

Q Can I replace by 275 watt heat lamps with 375 watt lamps?

A You can only use heat lamps which have been fitted and approved for use in your product. The rating label will state the maximum wattage for your product.

Q What is the maximum recommended light globe wattage that I can install in my Tastic?

A Check the rating label for the maximum safe wattage for your product.

Q What will happen if I leave my heat lamps on without fan operation?

A On certain models (Eco & Easy Duct) the fan will commence operation automatically to keep the unit operating at a safe temperature. When the unit has cooled sufficiently the fan will switch off automatically, while the heat lamps of Classic Tastic models will operate normally when the fan is off.

Q Why is my Tastic making noise?

A All Tastics create some noise due to the rapid movement of air through the Tastic.

Q Can I retro fit a remote control to my existing hardwired Tastic?

A No, unfortunately this is not possible.

Q My Tastic unit's extraction fan doesn't seem to be removing all the moisture and steam from my bathroom?

A There are a number of factors that will influence the exhaust fan's performance. Firstly you can improve your cross ventilation via an open door or window. There must be adequate ventilation in your roof cavity if exhausting into it so that the steam laden air can dissipate. If the ventilation space is restricted in your roof cavity then an Easy Duct Tastic may be required to duct the exhaust air to outside the home.

If you live in a traditionally cooler climate, in the winter months during hot showers, you may notice that there is more moisture and condensation build up. If this is the case, you may wish to improve your natural ventilation or invest in an additional exhaust fan.

Bathrooms which have high ceilings, are larger than average, or have an open shower may all require additional ventilation. We recommend that you visit our website for further details and suggestions on effectively ventilating your bathroom.

Q Can the installer rotate the IXL wall switch mechanisms?

A Yes, the wall switches can be rotated by a qualified electrical trade's person.

Q Can my installer use an alternative wall switch mechanism other than the one supplied with my IXL product?

A Yes, your authorised installer can use an alternative switch mechanism. (Not on Luminare)

EXTENSIVE PRODUCT WARRANTY

5 year in home warranty*

All IXL Tastic Classic and Premium 3 in 1 ranges are proudly made in Australia to the highest quality standards. Every unit is fully tested and supported with a 5 year in home warranty.

Customers are required to ring IXL Home to book a service agent. This will be free of charge if the unit is found to have a manufacturing fault.

2 year heat lamp replacement warranty*

We are so confident that our infra red heat lamps are high quality, we offer a 2 year replacement warranty should any of them fail within 2 years of purchasing your Tastic.

2 year Ventflo™ In-line Fan replacement warranty*

For a period of two years from the date of purchase, the Ventflo Inline extraction unit will be replaced without charge if proven to be defective and accessible.

Location of Tastic® for best results

Tastic units are ideally installed directly above the area where you dry yourself after showering. Your Tastic works by drawing steam-laden air from the room, and as with all exhaust fans, it is essential that sufficient air inlets exist through windows, vents or under doors.

Bathrooms that have high ceilings, are larger than average, or that have an open shower may all require additional ventilation.

If there is an open shower we recommend an additional IP-rated fan above the shower area regardless of the size of the bathroom. Examples include the Neo and Luminare Vent Modules or Tastic Eco Ventflo units.

*Room volume calculated using standard ceiling height of 2.4m.

*Where the in-line blower unit is installed into an environment that has limited access and the unit needs to be serviced or replaced under warranty, a replacement blower will be supplied free of charge by IXL, however, all associated reinstallation charges will be borne by the owner.

**Please note that if the bathroom flows into another open space such as a bedroom or walk-in robe then these areas need to be included in your calculations. If there is an open shower, we recommend an additional IP-rated fan above the shower area regardless of the size of the bathroom. NB: All Tastic products are only designed and approved for use in horizontal applications.

See instructions for full details and conditions.



tastic[®]

Proudly Australian owned
and manufactured in
Geelong, Victoria





IXL HOME IXL PTY LTD

Australia: P. 1300 727 421 | www.ixlappliances.com.au | customerservice@ixl.com.au
New Zealand: P. 0800 727 421 | www.ixlappliances.co.nz | service@ixlappliances.co.nz
IXL, TASTIC, TASTIC LUMINATE and TASTIC NEO are registered trademarks of Alver Pty Ltd in Australia and New Zealand used under licence by IXL Home Pty Ltd
VENTFLO, TASTIC VIVID, TASTIC ECO VIVID, TASTIC PRIME, TASTIC PARAMOUNT are trademarks of Alver Pty Ltd used under licence by IXL Home Pty Ltd

Whilst every effort is made to provide current information at the time this brochure was produced, continuing product improvements mean the enclosed specifications, images and literature may differ from what is actually available.

